




# Ceremic TGSi

## Technical Information Sheet

### Eigen Ceramic Range

Eigen Ceramic range is the most economical TGSi product currently available in the market.

It comes in four colours to meet the AS/NZS 1428.4 Standard's requirement for Luminance Contrast, against most substrates.

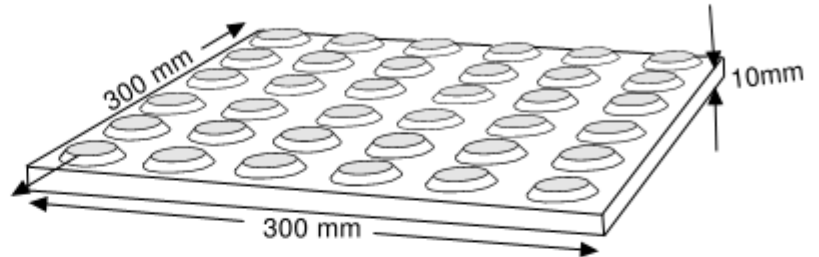

**Eigen Ceramic TGSi**

<p><b>Testings (Performed by CSIRO)</b></p> <p>AS/NZS 4586 Appendix A <i>Wet Pendulum 4S</i> <b>W</b></p> <p>AS/NZS 4586 Appendix D <i>Oil Wet Ramp Test</i> <b>R12</b></p> <p>AS/NZS 1428 4 <i>Wet &amp; Dry Luminance Reflectance</i> <b>Dry 44.09 / Wet 42.30</b></p> <p><b>Mean Contrast Range 29.6 - 57.3</b></p> <p>AS 4459.4 <i>Breaking Load</i> <b>2242 N</b></p> <p><i>Breaking Strength</i> <b>2092 N</b></p> <p><i>Modulus of Rupture</i> <b>31.39 N/mm<sup>2</sup></b></p> <p>ISO 10545-3 <i>Water Absorption</i> <b>0.19%</b></p>	<p><b>Colour Selection</b></p> <p>Ivory Black Grey Yellow</p> <p>Refer to colour system at <a href="http://www.eigentactile.com/">http://www.eigentactile.com/</a></p>	<p><b>Dimensions:</b></p> <p><i>Top of Dome</i> 25mm <i>Base of Dome</i> 35mm <i>Height of Dome</i> 5mm</p> <p><b>Tile Dimensions:</b> 300 x 300 mm</p> <p><b>Tile Thickness</b> 10mm</p> <p><i>Manufactured to AS/NZS 1428.4.1:2009</i></p>
---	--	--

Lay Eigen Ceramic Tactile as you would normal tile units.  
Tile thickness is 10mm and it is best to leave 13-15mm rebate in freshly laid concrete to accommodate glue and cement. Also, leave 2-3mm gap for grouting around the tiles.

Please visit <http://www.eigentactile.com/> for detailed installation guide.